



H/JIG/B



trend[®]
routing technology



Please read these instructions before use.

Dear Customer


Thank you for purchasing this Trend product, we hope you enjoy many years of creative and productive use.

Please remember to return your guarantee card within 28 days of purchase.

CONTENTS

TECHNICAL DATA _____ 1
SAFETY _____ 2-3
ITEMS REQUIRED _____ 4
DESCRIPTION OF PARTS _____ 5
ASSEMBLY _____ 6
 - Setting up the Plunge Router _____ 7
 - Fitting the Router Cutter _____ 8
OPERATION
 - Setting the Jig for Hinge Recessing _____ 9-10
 - Routing Hinge Recesses in the Door _____ 11-12
 - Routing Hinge Recesses in the Frame _____ 13-14
 - Fitting the Door _____ 15
MAINTENANCE _____ 15
ENVIRONMENTAL PROTECTION _____ 15
GUARANTEE _____ 15
SPARE PARTS
 - Spare Parts Diagram _____ 16
 - Spare Parts List _____ 16
QUICK START INSTRUCTIONS _____ 1B


The hinge jig will cut apertures to suit the hinge shown.

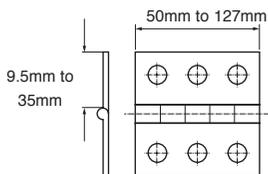

TECHNICAL DATA

Guide bush diameter	16mm	(⁵ / ₈ "
Hinge length	min. 50mm	(2")
	max. 127mm	(5")
Hinge width	min. 9.5mm	(³ / ₈ "
	max. 35mm	(1 ¹ / ₂ "
Door height	min. 1955mm	(6' 5")
	max. 2100mm	(6' 10")*
Door thickness	min. 16mm	(⁵ / ₈ "
	max. 51mm	(2")
Fixed stop thickness	max. 11mm	
Weight	2.8kg	

*For doors over 2000mm the bottom hinge position can no longer be 9" up from the bottom.

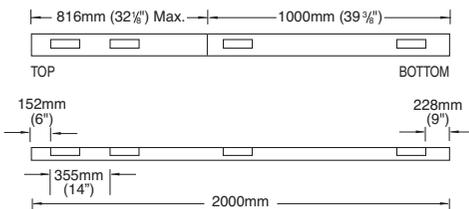

PLEASE NOTE: For doors less than 2000mm the bottom hinge position can no longer be 9" up from the bottom.

The following symbols are used throughout this manual:

Denotes risk of personal injury, loss of life or damage to the tool in case of non-observance of the instructions in this manual.

Refer to the instruction manual of your power tool.

This unit must not be put into service until it has been established that the power tool to be connected to this unit is in compliance with 2006/42/EC (identified by the CE marking on the power tool).

INTENDED USE

This jig allows hinge recesses to be routed in a wooden door or frame with separate stops. It should be used with a portable plunge router with a suitable guide bush and router cutter fitted.



If you require further technical information or spare parts, please call our technical support department or visit www.trend-uk.com



The jig will only work on door linings with separate stops or stops thinner than 11mm.

SAFETY



WARNING:

Observe the safety regulations in the instruction manual of the power tool to be used. Please read the following instructions carefully. Failure to do so could lead to serious injury. When using electric tools, basic safety precautions, including the following should always be followed to reduce the risk of fire, electric shock and personal injury. Also observe any applicable additional safety rules. Read the following safety instructions before attempting to operate this product.

PLEASE KEEP THESE INSTRUCTIONS IN A SAFE PLACE.

The attention of UK users is drawn to The Provision and Use of Work Equipment Regulations 1998, and any subsequent amendments.

Users should also read the HSE/HSC Safe Use of Woodworking Machinery Approved Code of Practice and Guidance Document and any amendments.

Users must be competent with woodworking equipment before using our products.

IMPORTANT NOTE:

Residual Risk. Although the safety instructions and operating manuals for our tools contain extensive instructions on safe working with power tools, every power tool involves a certain residual risk which cannot be completely excluded by safety mechanisms. Power tools must therefore always be operated with caution!

General

1. Disconnect power tool and attachment from power supply when not in use, before servicing, when making adjustments and when changing accessories such as cutters. Ensure switch is in "off" position. Always ensure cutter has stopped rotating.
2. Always mount the power tool, accessory or attachment in conformity with the instructions. Only use attachment and accessories specified in the power tool manual. The tool or attachment should not be modified or used for any application other than that for which it was designed. Do not force tool.
3. Keep children and visitors away. Do not let children or visitors touch the tool, accessory or attachment. Keep children and visitors away from work area. Make the workshop child proof with padlock and master switch.
4. Dress properly. Do not wear loose clothing or jewellery, they can be caught in moving parts. Rubber gloves and non-skid footwear is recommended when working outdoors. Wear protective hair

covering to contain long hair.

5. Consider working environment. Do not use the product in the rain or in a damp environment. Keep work area well lit. Do not use power tools near gasoline or flammable liquids. Keep workshop at a comfortable temperature so your hands are not cold. Connect machines that are used in the open via a residual current device (RCD) with an actuation current of 30 mA maximum. Use only extension cables that are approved for outdoor use.
6. The accessory or attachment must be kept level and stable at all times.
7. Keep work area clean. Cluttered workshops and benches can cause injuries. Ensure there is sufficient room to work safely.
8. Secure idle tools. When not in use, tools should be stored in a dry and high or locked up place, out of reach of children.
9. For best control and safety use both hands on the power tool and attachment. Keep both hands away from cutting area. Always wait for the spindle and cutter to stop rotating before making any adjustments.
10. Always keep guards in place and in good working order.
11. Remove any nails, staples and other metal parts from the workpiece.
12. Maintain tools and cutters with care. Keep cutters sharp and clean for better and safer performance. Do not use damaged cutters. Follow instructions for lubricating and changing accessories. Keep handles dry, clean and free from oil and grease.
13. Maintain accessories. Do not use damaged accessories. Only use accessories recommended by the manufacturer.
14. Check damaged parts. Before operation inspect the attachment, the power tool, the cable, extension cable and the plug carefully for signs of damage. Check for alignment of moving parts, binding, breakage, mounting and any other conditions that may effect its operation. Have any damage repaired by an Authorised Service Agent before using the tool or accessory. Protect tools from impact and shock.
15. Do not use tool if switch does not turn it on or off. Have defective switches replaced by an Authorised Service Agent
16. Don't over reach. Keep proper footing and balance at all times. Do not use awkward or uncomfortable hand positions.
17. Don't abuse the cable. Never carry power tool or accessory by cord or pull it to disconnect from the socket. Keep cord from heat, oil and sharp edges. Always trail the power cord away from the work area.
18. Connect dust extraction equipment. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.
19. Check all fixing and fastening nuts, bolts and screws on power tool, attachment and cutting tools before use to ensure they are tight and secure. Periodically check when machining over long periods.
20. Stay alert. Watch what you are doing. Use common sense. Do not operate tools when you are tired, under the influence of drugs or alcohol.
21. Personal Protective Equipment (PPE) for eye, ear and respiratory protection must be worn. All PPE must meet current UK and EU legislation.
22. Do not leave tools running unattended. Do not leave tool until it comes to a complete stop.
23. Always clamp workpiece being machined securely.
24. Only use cutting tools for woodworking that meet EN847-1/2 safety standards, and any subsequent amendments.
25. Vibration levels. Hand held power tools produce different vibration levels. You should always refer to the specifications and relevant Health & Safety Guide.

Routing Safety

1. Read and understand instructions supplied with power tool, attachment and cutter.
2. Keep hands, hair and clothing clear of the cutter.
3. Remove adjusting keys and spanners. Check to see that keys and adjusting spanners are removed from the router tool, cutter and attachment before turning router on. Make sure cutter can rotate freely.
4. Noise. Take appropriate measures for the protection of hearing if the sound pressure of 85dB(A) is exceeded. Routing sound pressure may exceed 85dB(A), so ear protection must be worn.
5. Eye protection. Always wear eye protection in the form of safety goggles, spectacles or visors to protect the eyes.
6. Respiratory protection. Wear a face or dust mask, or powered respirator. Dust masks/filters should be changed regularly.

7. Do not switch router on with the cutter touching the workpiece. At the end of the cut, release the router plunge and allow spindle to stop rotating. Never use the spindle lock as a brake
8. The direction of routing must always be opposite to the cutter's direction of rotation. Do not back-cut or climb-cut.
9. Check before cutting that there are no obstructions in the path of the router. Ensure there are no obstacles beneath workpiece when cutting full thickness, and that a sacrificial work surface is used.

Router Cutter Safety

1. Cutting tools are sharp. Care should be taken when handling them. Do not drop cutters or knock them against hard objects. Handle very small diameter cutters with extra care. Always return cutter to its packaging after use.
2. Always use cutters with a shank diameter corresponding to the size of the collet installed in your tool.
3. The maximum speed (n.max) marked on the tool, or in instructions or on packaging shall not be exceeded. Where stated the speed range shall be adhered to. Recommended speeds are shown in the Trend Routing Catalogue and/or website.
4. Always use router cutters in a router. Drill and boring bits must not be used in a router. Router cutters must only be used for the material cutting application for which they are designed. Do not use on metal or masonry.
5. Never use cutters with a diameter exceeding the maximum diameter indicated in the technical data of the powertool or attachment used.
6. Before each use check that the cutting tool is sharp and free from damage. Do not use the cutting tool if it is dull, broken or cracked or if in any other damage is noticeable or suspected.
7. Cutters should be kept clean. Resin build up should be removed at regular intervals with Resin Cleaner. The use of a PTFE dry lubricant will reduce resin build up. Do not use PTFE spray on plastic parts.
8. When using stacked tooling (multi-blade, block and groover etc.) on a spindle arbor, ensure that the cutting edges are staggered to each other to reduce the cutting impact.
9. Cutter shanks should be inserted into the collet all the way to the line indicated on the shank. This ensures that at least ¾ of the shank length is held in the collet. Ensure clamping

surfaces are cleaned to remove dirt, grease, oil and water.

10. Observe the correct assembly and fitting instructions in the router instruction manual for fitting the collet, nut and cutter.
11. Tool and tool bodies shall be clamped in such a way that they will not become loose during operation. Care shall be taken when mounting cutting tools to ensure that the clamping is by the shank of the cutting tool and that the cutting edges are not in contact with each other or with the clamping elements.
12. It is advisable to periodically check the collet and collet nut. A damaged, worn or distorted collet and nut can cause vibration and shank damage. Do not over-tighten the collet nut
13. Do not take deep cuts in one pass; take several shallow or light passes to reduce the side load applied to the cutter and router. Too deep a cut in one pass can stall the router.
14. In case of excessive vibrations whilst using the router stop immediately and have the eccentricity of the router, router cutter and clamping system checked by competent personnel
15. All fastening screws and nuts should be tightened using the appropriate spanner or key and to the torque value provided by the manufacturer.
16. Extension of the spanner or tightening using hammer blows shall not be permitted.
17. Clamping screws shall be tightened according to instructions provided by the manufacture. Where instructions are not provided, clamping screws shall be tightened in sequence from the centre outwards.

Using Routers In A Fixed Position

1. Attention should be made to the HSE's Safe Use of Vertical Spindle Moulding Machines Information Sheet No.18 and any revisions.
2. After work, release the router plunge to protect the cutter.
3. Always use a push-stick or push-block when making any cut less than 300mm in length or when feeding the last 300mm of the cut.
4. The opening around the cutter should be reduced to a minimum using suitably sized insert rings in the table and closing the back fence cheeks or fitting a false fence on the back fence.
5. Whenever possible use a work holding device or jig to secure component being machined. Ensure any attachment is securely fitted to the workbench, with table surface at

- approximately hip height.
6. Use a No-Volt Release Switch. Ensure it is fixed securely, easily accessible and used correctly.
7. In router table (inverted) mode, stand to the front right of the table. The cutter will rotate anti-clockwise when viewed from top so the feed direction is from the right (against the rotation of the cutter). In overhead mode, stand to the front left of the machine table and the feed direction is from the left.
8. Do not reach underneath table or put your hands or fingers at any time in the cutting path while tool is connected to a power supply.
9. Never thickness timber between the back of the cutter and the backfence.

Useful Advice When Routing


1. Judge your feed rate by the sound of the motor. Feed the router at a constant feed rate. Too slow a feed rate will result in burning.
2. Trial cuts should be made on waste material before starting any project.
3. When using some attachments e.g. a router table or dovetail jig, a fine height adjuster is recommended.
4. When using a template guide bush, ensure there is sufficient clearance between cutter tip and inside edge of bush and that it cannot come into contact with collet and nut. Ensure cutter and guide bush are concentric.

Router Cutter Repair/Maintenance

1. Repair of tools is only allowed in accordance with the manufacturers instructions.
2. The design of composite (tipped) tools shall not be changed in process of repair. Composite tools shall be repaired by a competent person i.e. a person of training and experience, who has knowledge of the design requirements and understands the levels of safety to be achieved.
3. Repair shall therefore include, e.g. the use of spare parts which are in accordance with the specification of the original parts provided by the manufacturer.
4. Tolerances which ensure correct clamping shall be maintained.
5. Care shall be taken that regrinding of the cutting edge will not cause weakening of the body and the connection of the cutting edge to the body.

Version 7.2 06/2013

ITEMS ENCLOSED

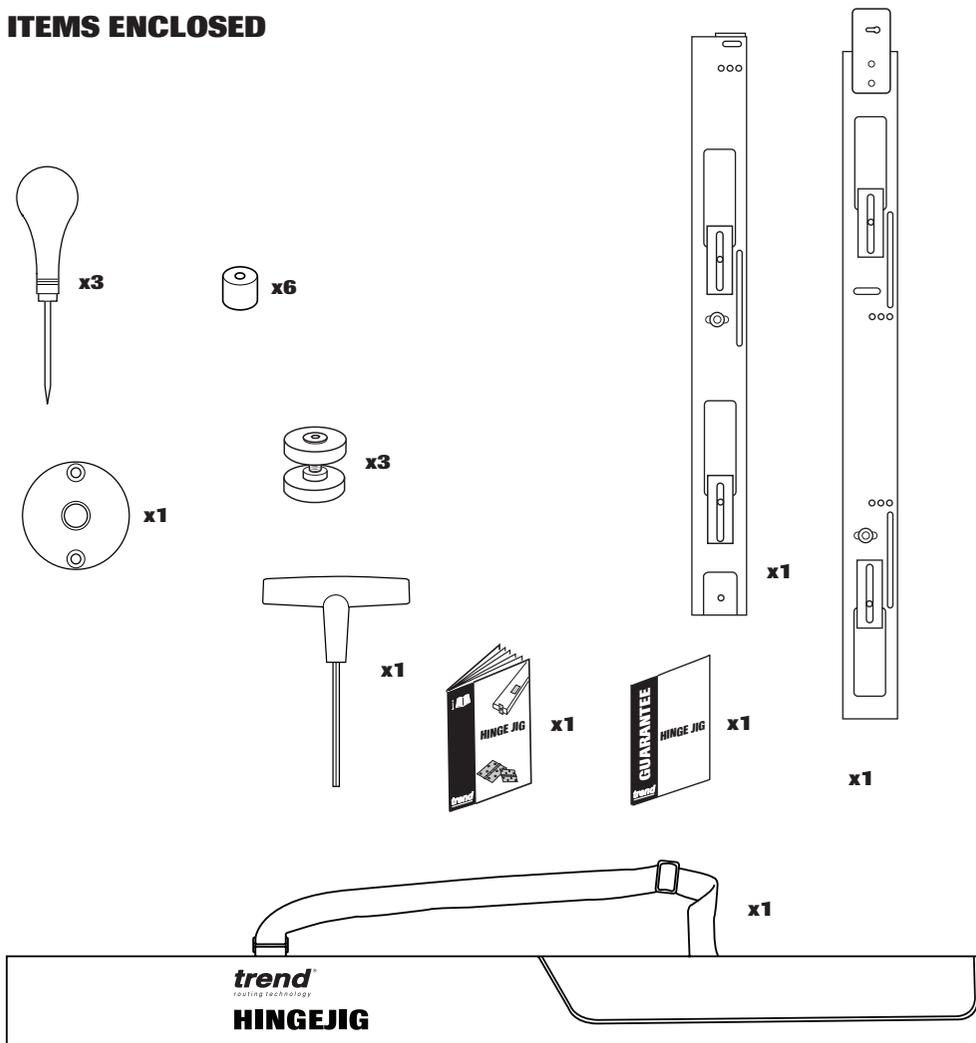


ITEMS REQUIRED

- 1/4" collet plunge router.
- 12mm diameter router cutter with 1/4" long series shank.
- Door clamping device.
- Hand tools.


DESCRIPTION OF PARTS

- (A) Jig body short (top)
- (B) Jig body long (bottom)
- (C) Aperture
- (D) Edge stop location slot
- (E) Swivel end plate
- (F) Bradawl hole
- (G) Guide bush 16mm with extra long spigot
- (H) Edge stop
- (I) Plastic spacer
- (J) Bradawl
- (K) T-handle hex key 3mm A/F
- (L) Engraved markings
- (M) Adjustment plate
- (N) Hinge setting position slot
- (O) Connecting plate with keyhole slot

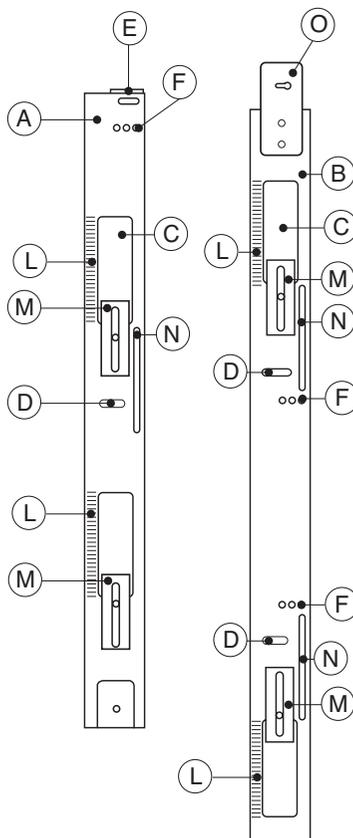

FOR FIRE DOORS

The second hinge 355mm (14") down from the top of the upper hinge is for fire doors. The middle aperture is not then used.

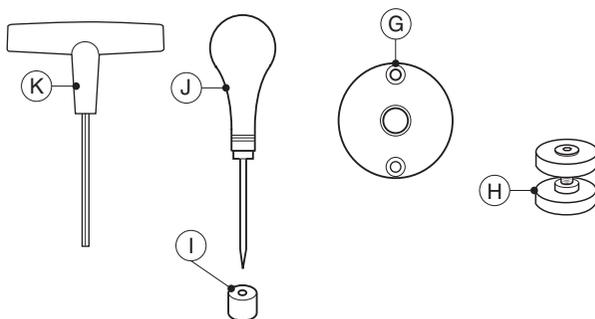


ASSEMBLY

The jig is in two separate pieces. It is assembled by the use of a one way keyhole slotted connecting plate.

Use the keyhole slot to capture the head of the screw and pull both parts together in the direction shown. Tighten the screw with the hex key to secure the jig together.



Assemble the three edge stops onto the jigs (if not done so already), these should be fitted into the three slots within the jig.

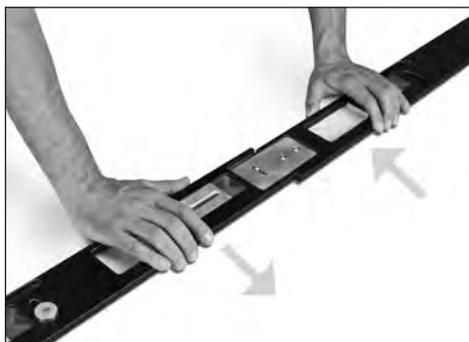

- Put two plastic spacers onto each bradawl blade. Take care of the sharp point. When using bradawls always ensure the two spacers are fitted.




**Bradawls are sharp!
Please take care.**

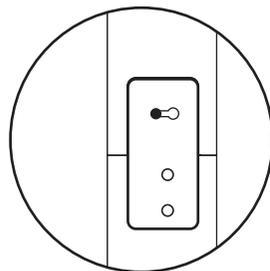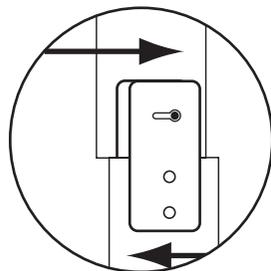

Setting up the Plunge Router

The guide bush fits directly to the Trend T5 Router. To fit the guide bush to other makes and models, a universal sub-base Ref. UNIBASE or circular sub-base Ref. GB/5 can be used. The Ref. UNIBASE is designed to suit the most popular plunge type routers (please see our website for compatibility). The Ref. GB/5 can be re-drilled by the user.

- Fit the guide bush to the base of the router using the screws supplied with the router.
- The Ref. UNIBASE Universal Sub-base has a central recess to allow fitting of the special guide bush Ref. GB160. The sub-base is supplied drilled to fit the most popular makes of routers.

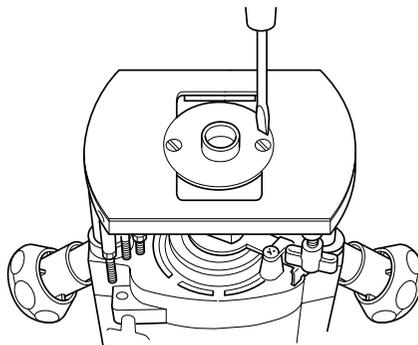

If there is any doubt about the concentricity of the bit relative to the guide bush, then a false sub-base should be used in order to ensure an accurate fit of hinges. For all other makes of router, the sub-base to suit your router will need to be purchased.



It is recommended that a plunge router is used with the hinge jig.




The T4 router will require a Unibase to accept the guide bush or special accessory guide bush Ref. GB/T4/160 can be used.

Fitting the Router Cutter




- The recommended router cutters for use with the jig are Refs. 3/8LX1/4TC, TR12X1/4TC or C019AX1/4TC.
- The cutter must have a 12mm diameter and a minimum overall length of 70mm.
- Unplug the router from mains, insert 25mm of the shank of the cutter into collet and gently tighten collet nut.

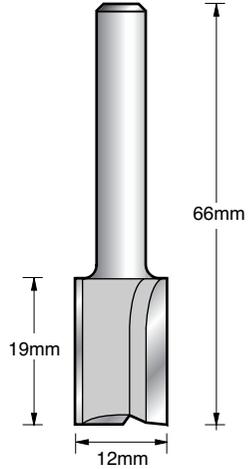

The guide bush must be concentric to the router collet assembly and router cutter. Before and during use please ensure the router cutter does not come into contact with the inside of the guide bush. When it is safe to do so check cutter and guide bush will not come into contact.

Template Guide Bush Principle

- The cross-section below shows the bit being guided by the guide bush around one of the apertures.

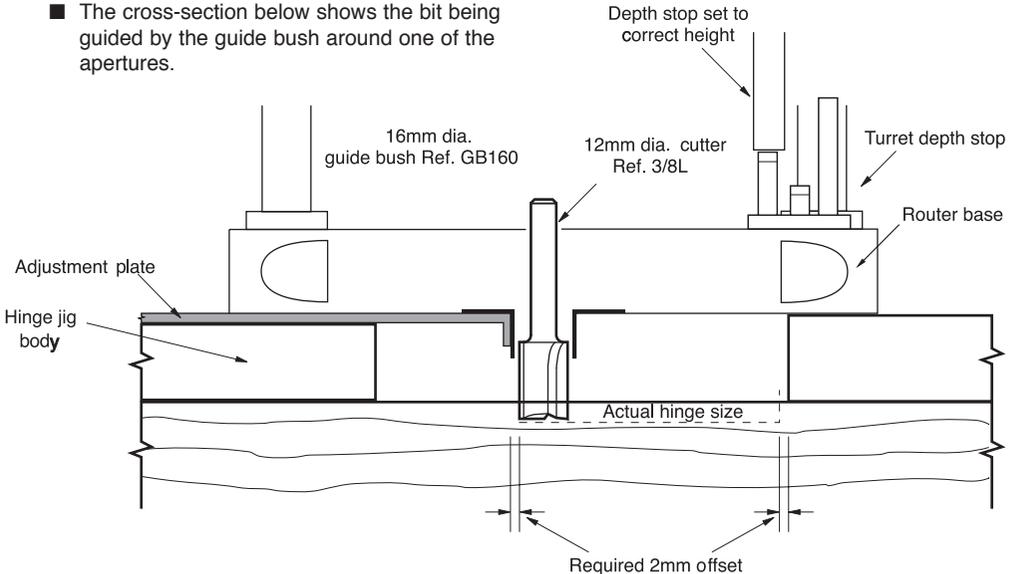

OPERATION




Setting the Jig for Hinge Recessing

The jig has adjustments which will require setting depending on the door size and thickness, as well as the size and positions of the hinges. These are all carried out with the hex key provided with the jig, and with one hinge.

The following setting up operation will only need to be carried out once for a set of doors having the same height dimensions and hinge sizes.

Setting the Width of the Recess for Standard Hinges


- Loosen the edge stop using the hex key.
- Place the knuckle of the hinge in the slot as shown in the diagram, and push in the direction shown.
- Move the edge stop so it butts up against the edge of the hinge.
- Tighten the edge stop by turning hex key clockwise.
- Repeat this sequence for all three edge stops.

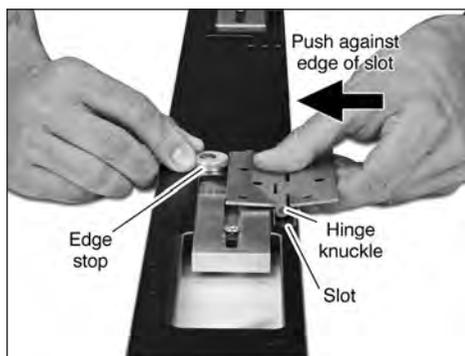

Ensure working position is comfortable, especially when setting up the jig and routing a hinge recess in a door.

Setting up the Hinge Length

- The aperture length can be set using the engraved markings and a hinge.
- Loosen the screw so that the adjustment plate is free to slide.
- Align the leaf of the hinge with '0' as shown.
- Slide the adjustment plate so that it touches the edge of the hinge. Tighten the screw with the hex key to secure the adjustment plate in place.
- Repeat this operation for the other hinge apertures as required.

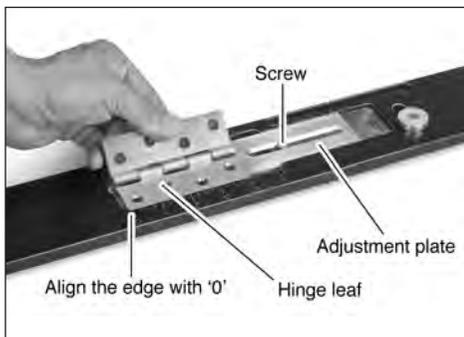

If the length set-up has been done correctly the length of the hinge aperture on the jig should be 4mm longer than the length of the actual hinge.

Setting the Depth of the Recess

The depth of the recess must be the same thickness as the hinge or slightly deeper. Most routers are fitted with a depth stop to limit the depth of plunge of the router. Refer to your router's instruction manual for particular details on using the depth stop. The depth of the recess for the hinge is set as follows:

- Release depth gauge on the router.
- Place jig onto the edge of the door.
- Place router onto jig and locate guide bush into one of the apertures of the jig.
- Gently plunge cutter through aperture until it touches the edge of the door.
- Lock the router's carriage in this position.
- Move depth gauge up by the thickness of the hinge by:
 1. Either using the depth gauge measurement/dial
or
 2. Placing a leaf of the hinge between the depth gauge and the stop.
- Lock off depth stop and remove hinge.

- Check the depth of the cutter is correct by first fully plunging the router and locking the plunge mechanism. Invert the router and place the jig over the guide bush, now check that the cutter protrudes past the template the same distance as the thickness of the hinge.

Double check all settings, ensure all screws are tight. Setting up is complete.



Routing Hinge Recesses in the Door



- The door should be laid on its edge with the hanging edge of the door facing upwards. Use the conventional block and wedge to keep the door securely in this position or use the Trend door stand Ref. D/STAND/A.
- Place the jig onto the edge of the door. Ensure that the jig is placed the correct way round so that the edge stops are on the knuckle edge of the door. The swivel end plate should be at the top of the door.
- Rotate the swivel end plate through 90° and slide the jig down the door until the swivel end plate touches the top of the door.
- Push the jig up to the door so that the edge stops touch the opening face of the door.
- Without letting the jig move, locate the bradawls into the bradawl holes.
- Hammer the bradawls carefully into the edge of the door until the nylon spacers fitted to the bradawls touch the face of the jig.
- Now plug in the router and place the router



Check two plastic spacers are on each bradawl before use.



The swivel end plate fixing screw may need to be loosened slightly so that it can swivel.




To prevent damaging the jig template, make sure the router's plunge is fully released after completing each cut.



with cutter and guide bush fitted into the first aperture of the jig.

- Position the guide bush in the corner of the aperture, switch router on and plunge the cutter until correct depth is reached. Lock the carriage of the router in this position. Rout around the aperture in a clockwise direction, then remove the waste from the centre of the aperture. See drawings below for direction of cut to prevent breakout.

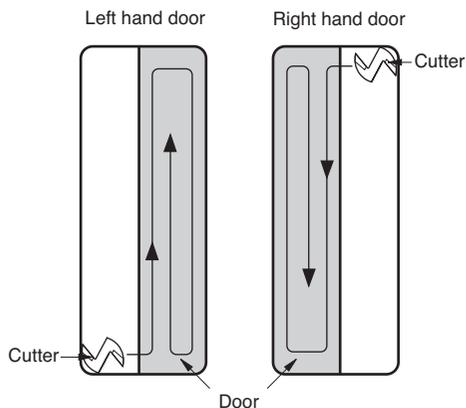

- Release the carriage of the router and repeat the procedure for the remaining apertures.
- Switch off router and remove jig from door by pulling out bradawls with a twisting action.
- Square off rounded corners of hinge recess with a corner chisel Ref. C/CHISEL and hammer.

**Routing Hinge Recesses
in the Frame** 

- No adjustments are necessary to the jig or the router.
- Swivel the end plate through 90°.
- Using the opposite side of the jig, butt the top of the jig into the head of the frame and up against the hanging jamb until the edge stops touch the opening edge of the frame.
- Without letting the jig move, locate the bradawls into the bradawl holes.
- Hammer the bradawls carefully into the door frame until the nylon spacers fitted to the bradawls touch the face of the jig.
- Now plug in the router and place the router with the cutter and guide bush fitted, into the first aperture of the jig.



**Extra care must be taken when routing
top hinge.**




**Check two plastic spacers are on each
bradawl before use.**



**Ensure working position is
comfortable, especially when setting
up the jig and routing a hinge recess
in a frame.**

- Position the guide bush in any corner of an aperture, switch router on and plunge the cutter into frame until depth, set by depth stop, is reached. Lock the carriage of the router in this position. Immediately start routing around the aperture in a clockwise direction. Then remove the waste from the centre of the aperture.

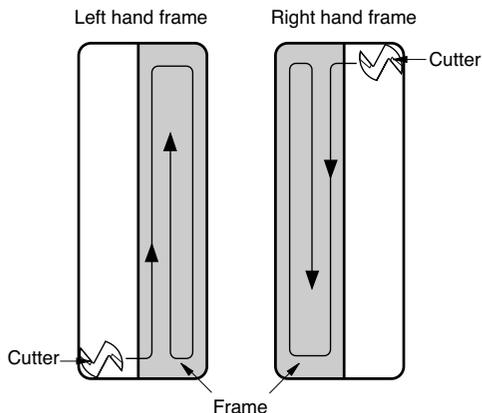

- Release the carriage of the router and repeat the procedure for the remaining apertures.
- Switch off router and remove jig from frame by pulling out bradawls with a twisting action.
- Square off rounded corners of hinge recess with a corner chisel Ref. C/CHISEL and hammer.
- After use of the jig, it can be disassembled by loosening the screws and sliding the two pieces of the jig apart. Keep edge stops fitted. Return jig and parts to storage/carry case.



Release the plunge action on the router after each hinge, as not doing so could result in cutting into the edge of the jig and causing damage. If you damage the jig, an epoxy resin can be used to fill the gap and if rubbed smooth will provide a continuous edge on which the guide bush can follow.

Fitting the Door

- Fit hinges to door and raise upright.
- Use a jack to raise door until hinges align with recess.
- Screw leaves to frame.

Providing procedure is carried out correctly and that the frame/lining is plumb and parallel, then no adjustment should be necessary due to the identical mirror image positioning of the recesses in both the door and the frame.

Other Points

If a larger gap is required to accommodate smoke seal or draft excluder, a packing piece can be temporarily glued or stuck to the swivel end plate in order to utilise the jig in the same technique and achieve accurate results.

Finishing the Frames

The holes left by the bradawls are on both closing edges of the door and frame and are very unobtrusive. These can be easily filled with a matching filler of a suitable colour.

ACCESSORIES

Please use only Trend original accessories.

Ref. 3/8LX1/4TC TR12X1/4TC C019AX1/4TC	12mm diameter router cutter with extra long shank.
Ref. D/STAND/A	Door stand to hold the door whilst routing.
Ref. D/CLAMP/A	Door clamp to hold the door whilst drilling and fitting locks.
Ref. C/CHISEL	Corner chisel for squaring corners of hinge recesses.
Ref. D/LIFT/A Ref. D/LIFT/B	Foot operated door lifters to support door while fitting into frame.



MAINTENANCE

Please use only Trend original spare parts and accessories.

This jig has been designed to operate over a long period of time with a minimum of maintenance. Continual satisfactory operation depends upon proper tool care and regular cleaning.

Cleaning

- Regularly clean the jig and remove resin build-up on all threads.

Lubrication

- Your jig requires no additional lubrication.

Storage

- After use, store jig in its storage/carry case.

ENVIRONMENTAL PROTECTION

Recycle raw materials instead of disposing as waste.

Packaging should be sorted for environmental-friendly recycling. The product and its accessories at the end of its life should be sorted for environmental-friendly recycling.


GUARANTEE

The jig carries a manufacturers guarantee in accordance with the conditions of the enclosed guarantee card.

H/JIG/B - SPARE PARTS DIAGRAM

V2.0 02/2011

Please use only Trend original spare parts.

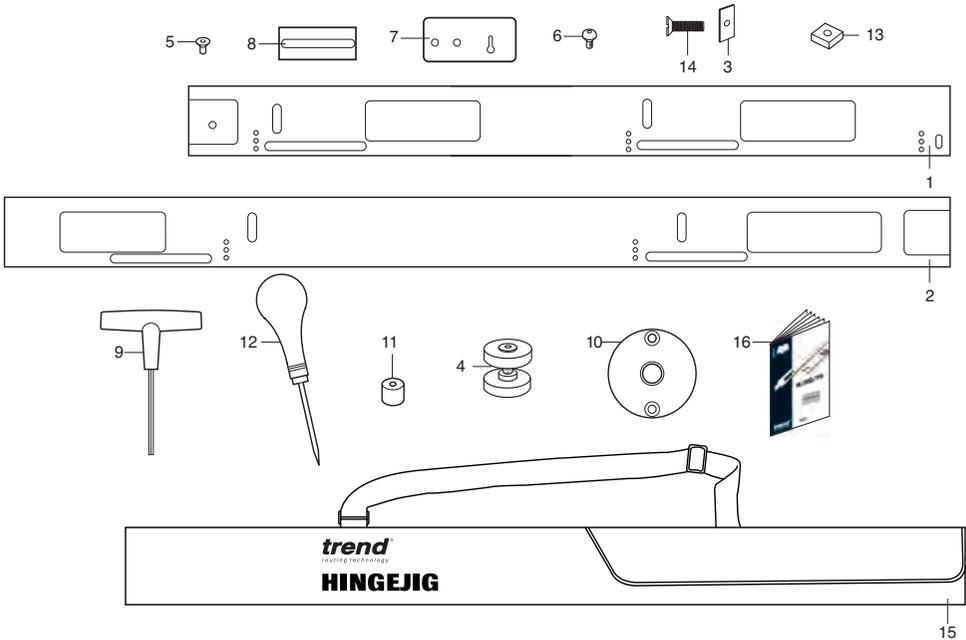

H/JIG/B - SPARE PARTS LIST			V2.0 02/2011
No.	Qty.	Desc.	Ref.
1	1	Jig Body Short (Top)	WP-HJ/B/01
2	1	Jig Body Long (Bottom)	WP-HJ/B/02
3	1	Swivel Plate	WP-HJ/B/04
4	3	Edge Stop Complete	WP-HJ/B/05
5	4	Machine Screw Countersink M5 x 10mm for Adjustment Plate	WP-HJ/B/06
6	3	Machine Screw Dome M5 x 8mm for Connecting Plate	WP-HJ/B/07
7	1	Connecting Plate	WP-HJ/B/08
8	1	Adjustment Plate	WP-HJ/B/09
9	1	T-Handle Hex Key 3mm A/F	HK/T/03
10	1	Guide Bush 16mm Dia.	GB160
11	6	Plastic Spacer	WP-HJ/08
12	3	Bradawl	WP-HJ/09
13	1	Nut Square M5	WP-NUT/07
14	1	Machine Screw Csk M5 x 16mm Pozzi®	WP-SCW/11
15	1	Carry Case	CASE/HJ/A
16	1	Manual	MANU/HJ/B

QUICK START INSTRUCTIONS

These instructions are provided for those who are confident with the router and are already familiar with the H/JIG/B.

Setting Up

1. Fit router cutter and guide bush to router.
2. Position door with hanging edge uppermost.
3. Adjust edge stops to width of hinge.

Routing the Door

1. Place hinge jig on hanging edge of door.
2. Rotate the end plate at 90° to jig.
3. Ensure end plate touches end of door.
4. Ensure edge-stops touch opening face of door.
5. Secure jig to door using the two bradawls.
6. Adjust top blocks to position of hinges.
7. Adjust bottom blocks to length of hinges.
8. Adjust depth stop on router to thickness of hinge.
9. Switch router on and locate guide bush into aperture.
10. Plunge down router and rout clockwise.
11. Repeat routing operation for each hinge recess.
12. Chisel corners square by hand to receive hinges or use corner chisel. Ref. C/CHISEL.

Routing the Frame

1. Rotate the end plate until flush with jig.
2. Butt the end plate into the head of frame.
3. Ensure edge-stops touch edge of frame.
4. Secure jig to door frame using the two bradawls.
5. Locate guide bush into aperture and switch router on.
6. Plunge down router and rout clockwise.
7. Repeat routing operation for each hinge recess.
8. Chisel corners square by hand to receive hinges or use a corner chisel Ref. C/CHISEL.

MANU/HJ/B v3.1



RECYCLABLE

Trend Machinery & Cutting Tools Ltd.
Odhams Trading Estate St Albans Road
Watford WD24 7TR England
Tel: 0044(0)1923 249911
technical@trendm.co.uk
www.trend-uk.com

© Copyright Trend 2014, 2015. No part of this publication may be reproduced, stored or transmitted in any form without prior permission. Our policy of continuous improvement means that specifications may change without notice. Trend Machinery and Cutting Tools cannot be held liable for any material rendered unusable or any form of consequential loss. E&OE

® All registered trademarks acknowledged.